

# Fundamentals Physics

**Eleventh Edition**

Halliday

## Chapter 11


### Rolling, Torque, and Angular Momentum

1

#### 11-1 Rolling as Translation and Rotation Combined (1 of 6)

##### Learning Objectives

- 11.01** Identify that smooth rolling can be considered as a combination of pure translation and pure rotation
- 11.02** Apply the relationship between the center-of-mass speed and the angular speed of a body in smooth rolling

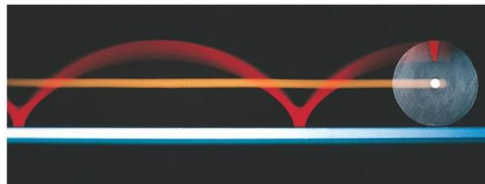

Richard Megna/Fundamental Photographs


**Figure 11-2**

Copyright ©2018 John Wiley & Sons, Inc

2

2

## 11-1 Rolling as Translation and Rotation Combined (2 of 6)

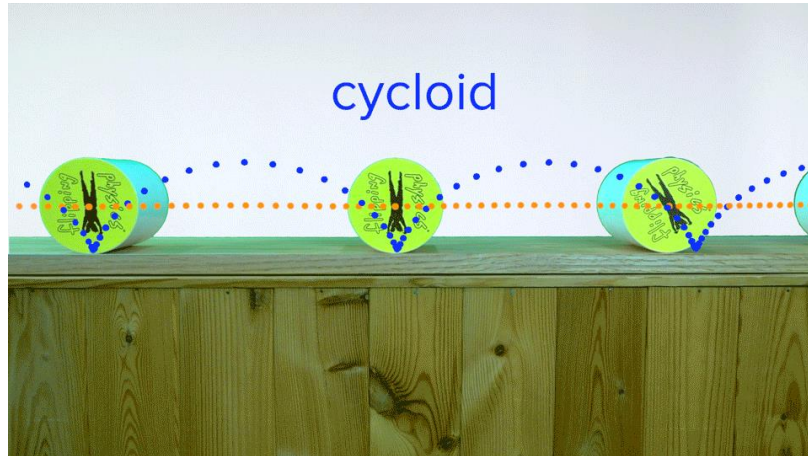

flippingphysics.com

Copyright ©2018 John Wiley &amp; Sons, Inc

3

3

## 11-1 Rolling as Translation and Rotation Combined (3 of 6)

- We consider only objects that roll smoothly (no slip)
- The center of mass (com) of the object moves in a straight line parallel to the surface
- The object rotates around the com as it moves
- The rotational motion is defined by:

$$S = \theta R, \quad \text{Equation (11-1)}$$

$$v_{\text{com}} = \omega R \quad \text{Equation (11-2)}$$

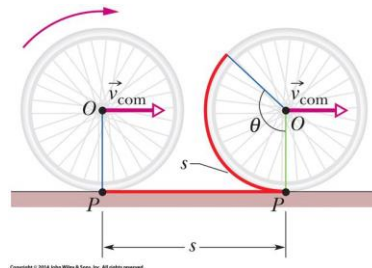


Figure 11-3

Copyright © 2018 John Wiley &amp; Sons, Inc. All rights reserved.

Copyright ©2018 John Wiley &amp; Sons, Inc

4

4

## 11-1 Rolling as Translation and Rotation Combined (4 of 6)

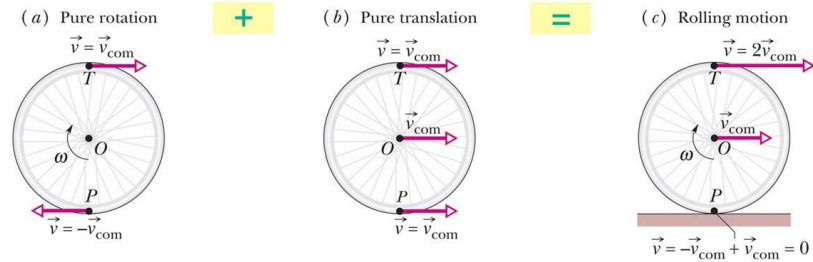


Figure 11-4


- The figure shows how the velocities of translation and rotation combine at different points on the wheel

Copyright ©2018 John Wiley & Sons, Inc

5

5

## 11-1 Rolling as Translation and Rotation Combined (5 of 6)

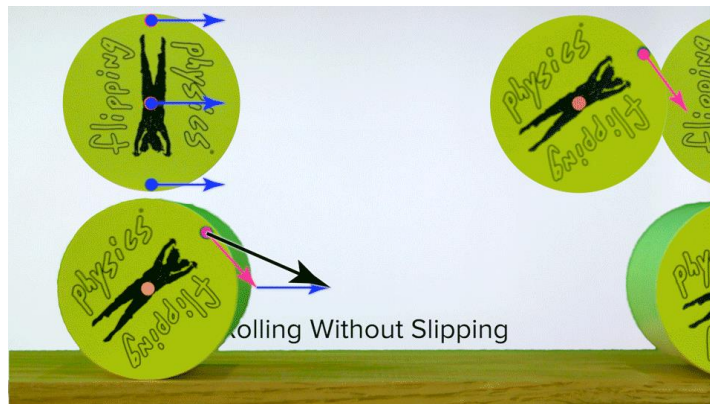

- The figure shows how the velocities of translation and rotation combine at different points on the wheel

Copyright ©2018 John Wiley & Sons, Inc

6

6

## 11-1 Rolling as Translation and Rotation Combined (6 of 6)

### Checkpoint 1

The rear wheel on a clown's bicycle has twice the radius of the front wheel, (a) When the bicycle is moving, is the linear speed at the very top of the rear wheel greater than, less than, or the same as that of the very top of the front wheel? (b) Is the angular speed of the rear wheel greater than, less than, or the same as that of the front wheel?

### Answer:

- (a) the same
- (b) less than

Copyright ©2018 John Wiley & Sons, Inc

7

7

## 11-2 Forces and Kinetic Energy of Rolling (1 of 12)

### Learning Objectives

- 11.03** Calculate the kinetic energy of a body in smooth rolling as the sum of the translational kinetic energy of the center of mass and the rotational kinetic energy around the center of mass.
- 11.04** Apply the relationship between the work done on a smoothly rolling object and its kinetic energy change.
- 11.05** For smooth rolling (and thus no sliding), conserve mechanical energy to relate initial energy values to the values at a later point.

Copyright ©2018 John Wiley & Sons, Inc

8

8

## 11-2 Forces and Kinetic Energy of Rolling (2 of 12)

- 11.06** Draw a free-body diagram of an accelerating body that is smoothly rolling on a horizontal surface or up or down on a ramp.
- 11.07** Apply the relationship between the center-of-mass acceleration and the angular acceleration.
- 11.08** For smooth rolling up or down a ramp, apply the relationship between the object's acceleration, its rotational inertia, and the angle of the ramp.

Copyright ©2018 John Wiley &amp; Sons, Inc

9

9

## 11-2 Forces and Kinetic Energy of Rolling (3 of 12)

- Combine translational and rotational kinetic energy:

$$K = \frac{1}{2} I_{\text{com}} \omega^2 + \frac{1}{2} M v_{\text{com}}^2. \quad \text{Equation (11-5)}$$

A rolling object has two types of kinetic energy: a rotational kinetic energy  $\left(\frac{1}{2} I_{\text{com}} \omega^2\right)$  due to its rotation about its center of mass and a translational kinetic energy  $\left(\frac{1}{2} M v_{\text{com}}^2\right)$  due to translation of its center of mass.

- If a wheel accelerates,
 
$$a_{\text{com}} = \alpha R \quad \text{Equation (11-6)}$$
 its angular speed changes
- A force must act to prevent slip




Figure 11-7

Copyright ©2018 John Wiley &amp; Sons, Inc

10

10

## 11-2 Forces and Kinetic Energy of Rolling (4 of 12)

- If slip occurs, then the motion is not smooth rolling!
- For smooth rolling down a ramp:
  1. The gravitational force is vertically down
  2. The normal force is perpendicular to the ramp
  3. The force of friction points up the slope

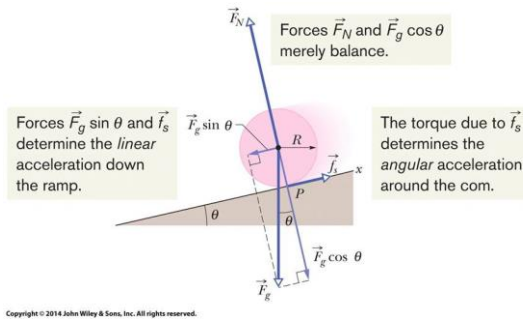


Figure 11-8

Copyright ©2018 John Wiley & Sons, Inc

11

11

## 11-2 Forces and Kinetic Energy of Rolling (5 of 12)

- Write the Newton's transl. equation of motion along the ramp
 
$$f_s - Mg \sin \theta = Ma_{\text{com}}$$
- The only force that creates a torque on the wheel is the (static) frictional force
 
$$f_s R = I_{\text{com}} \alpha$$
- The angular acceleration  $\alpha > 0$  (counterclockwise), thus we substitute  $-\frac{a_{\text{com},x}}{R}$

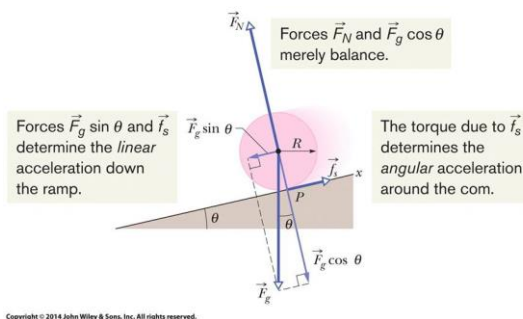


Figure 11-8

Copyright ©2018 John Wiley & Sons, Inc

12

12

## 11-2 Forces and Kinetic Energy of Rolling (6 of 12)

- Substituting  $\alpha$  with its  $a_{\text{com},x}$  counterpart, yield

$$f_s = \frac{I_{\text{com}}\alpha}{R} = -I_{\text{com}} \frac{a_{\text{com},x}}{R^2}$$

- Equate this with the translational equation

$$f_s - Mg \sin \theta = Ma_{\text{com}}$$

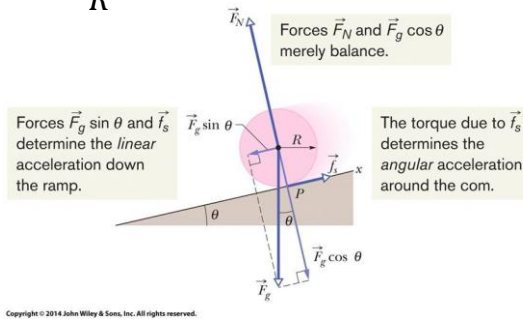


Figure 11-8

Copyright ©2018 John Wiley & Sons, Inc

13

13

## 11-2 Forces and Kinetic Energy of Rolling (7 of 12)

- We can use this equation to find the acceleration of such a body

$$a_{\text{com},x} = -\frac{g \sin \theta}{1 + \frac{I_{\text{com}}}{MR^2}} \quad \text{Equation (11-10)}$$

- Note that the frictional force produces the rotation
- Without friction, the object will simply slide

Copyright ©2018 John Wiley & Sons, Inc

14

14

## 11-2 Forces and Kinetic Energy of Rolling (8 of 12)

### Checkpoint 1

Disks  $A$  and  $B$  are identical and roll across a floor with equal speeds. Then disk  $A$  rolls up an incline, reaching a maximum height  $h$ , and disk  $B$  moves up an incline that is identical except that it is frictionless. Is the maximum height reached by disk  $B$  greater than, less than, or equal to  $h$ ?

Answer:

The maximum height reached by  $B$  is less than that reached by  $A$ . For  $A$ , all the kinetic energy becomes potential energy at  $h$ . Since the ramp is frictionless for  $B$ , all of the rotational  $K$  stays rotational, and only the translational kinetic energy becomes potential energy at its maximum height.

Copyright ©2018 John Wiley & Sons, Inc

15


15

## 11-2 Forces and Kinetic Energy of Rolling (9 of 12)

### Ball rolling down a ramp

A uniform ball, of mass  $M = 6.00$  kg and radius  $R$ , rolls smoothly from rest down a ramp at angle  $\theta = 30.0^\circ$  (Fig. 11-8).

(a) The ball descends a vertical height  $h = 1.20$  m to reach the bottom of the ramp. What is its speed at the bottom?



16

16



## 11-2 Forces and Kinetic Energy of Rolling (10 of 12)

### Ball rolling down a ramp

**Calculations:** Thus, we conserve mechanical energy

$$K_f + U_f = K_i + U_i, \quad (11-11)$$

$$\left(\frac{1}{2}I_{\text{com}}\omega^2 + \frac{1}{2}Mv_{\text{com}}^2\right) + 0 = 0 + Mgh, \quad (11-12)$$

Doing so, substituting  $\frac{2}{5}MR^2$  for  $I_{\text{com}}$  (from Table 10-2f), and then solving for  $v_{\text{com}}$  give us

$$\begin{aligned} v_{\text{com}} &= \sqrt{\left(\frac{10}{7}\right)gh} = \sqrt{\left(\frac{10}{7}\right)(9.8 \text{ m/s}^2)(1.20 \text{ m})} \\ &= 4.10 \text{ m/s.} \end{aligned} \quad (\text{Answer})$$

Note that the answer does not depend on  $M$  or  $R$ .

## 11-2 Forces and Kinetic Energy of Rolling (11 of 12)

### Ball rolling down a ramp

(b) What are the magnitude and direction of the frictional force on the ball as it rolls down the ramp?

**Calculations:** Before we can use Eq. 11-9, we need the ball's acceleration  $a_{\text{com},x}$  from Eq. 11-10:

$$\begin{aligned} a_{\text{com},x} &= -\frac{g \sin \theta}{1 + I_{\text{com}}/MR^2} = -\frac{g \sin \theta}{1 + \frac{2}{5}MR^2/MR^2} \\ &= -\frac{(9.8 \text{ m/s}^2) \sin 30.0^\circ}{1 + \frac{2}{5}} = -3.50 \text{ m/s}^2. \end{aligned}$$

## 11-2 Forces and Kinetic Energy of Rolling (12 of 12)

### Ball rolling down a ramp

(b) What are the magnitude and direction of the frictional force on the ball as it rolls down the ramp?

Note that we needed neither mass  $M$  nor radius  $R$  to find  $a_{\text{com},x}$ . Thus, any size ball with any uniform mass would have this smoothly rolling acceleration down a  $30.0^\circ$  ramp.

We can now solve Eq. 11-9 as

$$\begin{aligned} f_s &= -I_{\text{com}} \frac{a_{\text{com},x}}{R^2} = -\frac{2}{5}MR^2 \frac{a_{\text{com},x}}{R^2} = -\frac{2}{5}Ma_{\text{com},x} \\ &= -\frac{2}{5}(6.00 \text{ kg})(-3.50 \text{ m/s}^2) = 8.40 \text{ N.} \quad (\text{Answer}) \end{aligned}$$

Copyright ©2018 John Wiley & Sons, Inc

19

19

## 11-3 The Yo-Yo (1 of 3)

### Learning Objectives

- 11.09** Draw a free-body diagram of a yo-yo moving up or down its string.
- 11.10** Identify that a yo-yo is effectively an object that rolls smoothly up or down a ramp with an incline angle of  $90^\circ$ .
- 11.11** For a yo-yo moving up or down its string, apply the relationship between the yo-yo's acceleration and its rotational inertia.
- 11.12** Determine the tension in a yo-yo's string as the yo-yo moves up or down the string.


Copyright ©2018 John Wiley & Sons, Inc

20

20

## 11-3 The Yo-Yo (2 of 3)

- As a yo-yo moves down a string, it loses potential energy  $mgh$  but gains rotational and translational kinetic energy
- To find the linear acceleration of a yo-yo accelerating down its string:
  - Rolls down a “ramp” of angle  $90^\circ$
  - Rolls on an axle instead of its outer surface
  - Slowed by tension  $T$  rather than friction

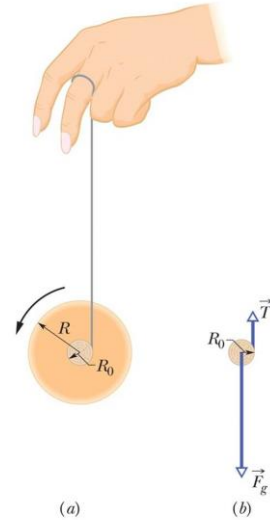

Copyright © 2014 John Wiley & Sons, Inc. All rights reserved

Figure 11-9

Copyright ©2018 John Wiley & Sons, Inc

21

21

## 11-3 The Yo-Yo (3 of 3)

- Replacing the values in 11-10 leads us to:

$$a_{\text{com}} = -\frac{g}{1 + \frac{I_{\text{com}}}{MR_0^2}}, \quad \text{Equation (11-13)}$$

**Example** Calculate the acceleration of the yo-yo

- $M = 150$  grams,  $R_0 = 3$  mm,  $I_{\text{com}} = \frac{Mr^2}{2} = 3 \times 10^{-5}$  kg m<sup>2</sup>
- Therefore

$$a_{\text{com}} = -\frac{9.8 \frac{\text{m}}{\text{s}^2}}{1 + \frac{3 \times 10^{-5}}{0.15 \times 0.003^2}} = -0.4 \frac{\text{m}}{\text{s}^2}$$

Copyright ©2018 John Wiley & Sons, Inc

22

22

## 11-4 Torque Revisited (1 of 7)

### Learning Objectives

- 11.13** Identify that torque is a vector quantity.
- 11.14** Identify that the point about which a torque is calculated must always be specified.
- 11.15** Calculate the torque due to a force on a particle by taking the cross product of the particle's position vector and the force vector, in either unit-vector notation or magnitude-angle notation.
- 11.16** Use the right-hand rule for cross products to find the direction of a torque vector.


Copyright ©2018 John Wiley &amp; Sons, Inc

23

23

## 11-4 Torque Revisited (2 of 7)

- Previously, torque was defined only for a rotating body and a fixed axis
- Now we redefine it for an individual particle that moves along any path relative to a fixed point
- The path need not be a circle; torque is now a vector
- Direction determined with right-hand-rule

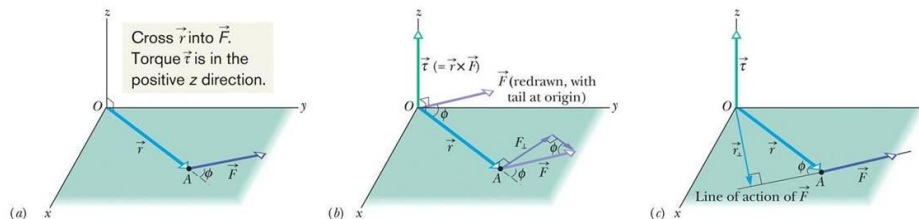

Copyright © 2014 John Wiley &amp; Sons, Inc. All rights reserved.

Figure 11-10

Copyright ©2018 John Wiley &amp; Sons, Inc

24

24

## 11-4 Torque Revisited (3 of 7)

- The general equation for torque is:

$$\vec{\tau} = \vec{r} \times \vec{F} \quad \text{Equation (11-14)}$$

- We can also write the magnitude as:

$$\tau = rF \sin \phi, \quad \text{Equation (11-15)}$$

- Or, using the perpendicular component of force or the moment arm of  $F$ :

$$\tau = rF_{\perp}, \quad \text{Equation (11-16)}$$

$$\tau = r_{\perp}F, \quad \text{Equation (11-17)}$$

## 11-4 Torque Revisited (4 of 7)

### Checkpoint 3

The position vector  $\vec{r}$  of a particle points along the positive direction of a  $z$  axis. If the torque on the particle is (a) zero, (b) in; the negative direction of  $x$ , and (c) in the negative direction of  $y$ , in what direction is the force causing the torque?

#### Answer:

- (a) along the  $z$  direction
- (b) along the  $+y$  direction
- (c) along the  $+x$  direction

## 11-4 Torque Revisited (5 of 7)

**Example** Calculating net torque:

### Torque on a particle due to a force

In Fig. 11-11a, three forces, each of magnitude 2.0 N, act on a particle. The particle is in the  $xz$  plane at point  $A$  given by position vector  $\vec{r}$ , where  $r = 3.0$  m and  $\theta = 30^\circ$ . What is the torque, about the origin  $O$ , due to each force?

Copyright ©2018 John Wiley & Sons, Inc


27

27

## 11-4 Torque Revisited (6 of 7)

**Example** Calculating net torque:

**Figure 11-11**

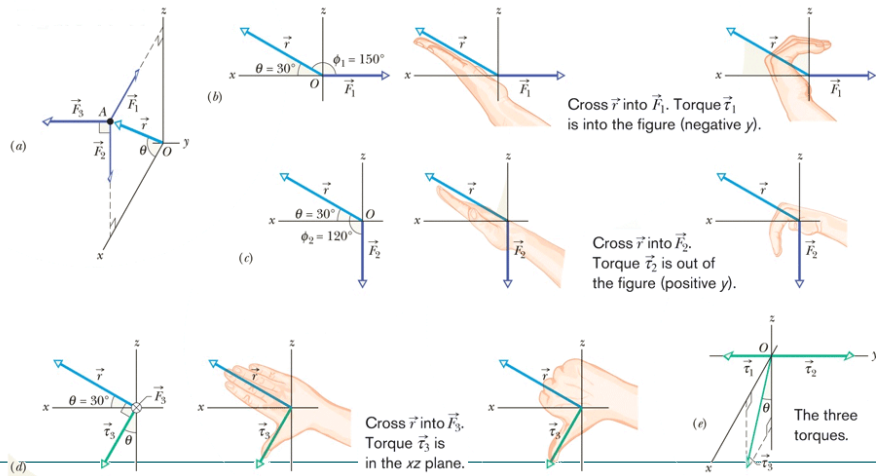

Copyright ©2018 John Wiley & Sons, Inc

28

Copyright © 2014 John Wiley & Sons, Inc. All rights reserved.

28

## 11-4 Torque Revisited (7 of 7)

**Example** Calculating net torque:

### Torque on a particle due to a force

$$\tau_1 = rF_1 \sin \phi_1 = (3.0 \text{ m})(2.0 \text{ N})(\sin 150^\circ) = 3.0 \text{ N} \cdot \text{m},$$

$$\tau_2 = rF_2 \sin \phi_2 = (3.0 \text{ m})(2.0 \text{ N})(\sin 120^\circ) = 5.2 \text{ N} \cdot \text{m},$$

$$\text{and } \tau_3 = rF_3 \sin \phi_3 = (3.0 \text{ m})(2.0 \text{ N})(\sin 90^\circ) \\ = 6.0 \text{ N} \cdot \text{m.} \quad (\text{Answer})$$

## 11-5 Angular Momentum (1 of 6)

### Learning Objectives

- 11.17** Identify that angular momentum is a vector quantity.
- 11.18** Identify that the fixed point about which an angular momentum is calculated must always be specified.
- 11.19** Calculate the angular momentum of a particle by taking the cross product of the particle's position vector and its momentum vector, in either unit-vector notation or magnitude-angle notation.
- 11.20** Use the right-hand rule for cross products to find the direction of an angular momentum vector.

## 11-5 Angular Momentum

(2 of 6)

- Here we investigate the angular counterpart to linear momentum

- We write:

$$\vec{\ell} = \vec{r} \times \vec{p} = m(\vec{r} \times \vec{v}) \quad \text{Equation (11-18)}$$

- Note that the particle need not rotate around  $O$  to have angular momentum around it

- The unit of angular momentum is  $\text{kg m}^2/\text{s}$ , or Js





Figure 11-12 Copyright © 2014 John Wiley & Sons, Inc. All rights reserved.

Copyright ©2018 John Wiley & Sons, Inc

31

31

## 11-5 Angular Momentum

(2 of 6)

- To find the direction of angular momentum, use the right-hand rule to relate  $r$  and  $v$  to the result
- To find the magnitude, use the equation for the magnitude of a cross product:

$$\ell = rmv \sin\phi, \quad \text{Equation (11-19)}$$

- The unit of angular momentum is

$$\ell = rp_{\perp} = rmv_{\perp}, \quad \text{Equation (11-20)}$$

$$\ell = r_{\perp}p = r_{\perp}mv, \quad \text{Equation (11-21)}$$





Figure 11-12 Copyright © 2014 John Wiley & Sons, Inc. All rights reserved.

Copyright ©2018 John Wiley & Sons, Inc

32

32



## 11-5 Angular Momentum (5 of 6)

- Angular momentum has meaning only with respect to a specified origin
- It is always perpendicular to the plane formed by the position and linear momentum vectors

Copyright ©2018 John Wiley &amp; Sons, Inc


33

33

## 11-5 Angular Momentum (5 of 6)

### Checkpoint 4

In part *a* of the figure, particles 1 and 2 move around point *O* in circles with radii 2 m and 4 m. In part *b*, particles 3 and 4 travel along straight lines at perpendicular distances of 4 m and 2 m from point *O*. Particle 5 moves directly away from *O*. All five particles have the same mass and the same constant speed, (a) Rank the particles according to the magnitudes of their angular momentum about point *O*, greatest first, (b) Which particles have negative angular momentum about point *O*?

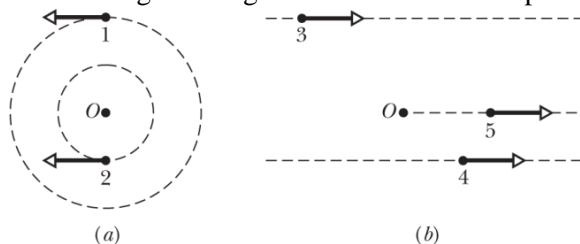


Copyright ©2018 John Wiley &amp; Sons, Inc

34

34

## 11-5 Angular Momentum (6 of 6)

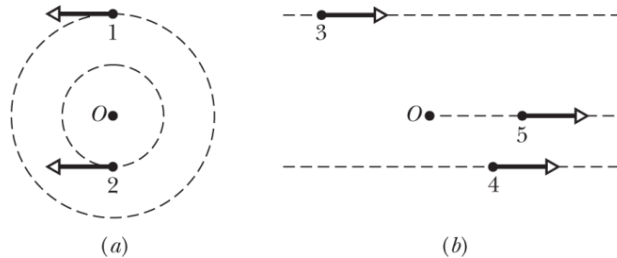

**Answer:**

(a) 1 & 3, 2 & 4, 5

(b) 2 and 3 (assuming counterclockwise is positive)

Copyright ©2018 John Wiley & Sons, Inc

35

35

## 11-6 Newton's Second Law in Angular Form (1 of 6)

### Learning Objectives

**11.21** Apply Newton's second law in angular form to relate the torque acting on a particle to the resulting rate of change of the particle's angular momentum, all relative to a specified point.

Copyright ©2018 John Wiley & Sons, Inc

36

36

## 11-6 Newton's Second Law in Angular Form (2 of 6)

- We rewrite Newton's second law as:

$$\vec{\tau}_{\text{net}} = \frac{d\vec{\ell}}{dt} \quad (\text{single particle}). \quad \text{Equation (11-23)}$$

- The torque and the angular momentum must be defined with respect to the same point (usually the origin)  
The (vector) sum of all the torques acting on a particle is equal to the time rate of change of the angular momentum of that particle.
- Note the similarity to the linear form:

$$\vec{F}_{\text{net}} = \frac{d\vec{p}}{dt} \quad (\text{single particle}) \quad \text{Equation (11-22)}$$

Copyright ©2018 John Wiley &amp; Sons, Inc

37

37


## 11-6 Newton's Second Law in Angular Form (3 of 6)

### Checkpoint 5

The figure shows the position vector  $\vec{r}$  of a particle at a certain instant, and four choices for the direction of a force that is to accelerate the particle. All four choices lie in the  $xy$  plane. (a) Rank the choices according to the magnitude of the time rate of change  $\left(\frac{d\vec{\ell}}{dt}\right)$  they produce in the angular momentum of the particle about point  $O$ , greatest first, (b) Which choice results in a negative rate of change about  $O$ ?

**Answer:**

- (a)  $F_3, F_1, F_2$  &  $F_4$   
 (b)  $F_3$  (assuming counter clockwise is positive)



Copyright ©2018 John Wiley &amp; Sons, Inc

38

38

## 11-6 Newton's Second Law in Angular Form (4 of 6)

### Torque and the time derivative of angular momentum

Figure 11-14a shows a freeze-frame of a 0.500 kg particle moving along a straight line with a position vector given by

$$\vec{r} = (-2.00t^2 - t)\hat{i} + 5.00\hat{j},$$

with  $\vec{r}$  in meters and  $t$  in seconds, starting at  $t = 0$ . The position vector points from the origin to the particle. In unit-vector notation, find expressions for the angular momentum  $\vec{\ell}$  of the particle and the torque  $\vec{\tau}$  acting on the particle, both with respect to (or about) the origin. Justify their algebraic signs in terms of the particle's motion.


Copyright ©2018 John Wiley & Sons, Inc

39

39

## 11-6 Newton's Second Law in Angular Form (5 of 6)

### Torque and the time derivative of angular momentum

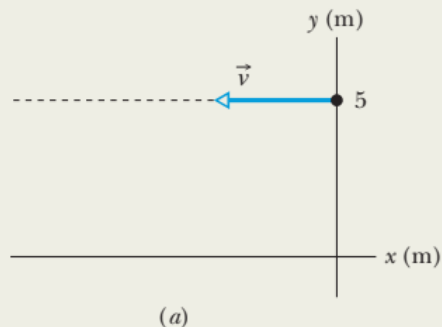

Copyright ©2018 John Wiley & Sons, Inc

40

40

## 11-6 Newton's Second Law in Angular Form (6 of 6)

Torque and the time derivative of angular momentum

$$\begin{aligned}\vec{v} &= \frac{d}{dt}((-2.00t^2 - t)\hat{i} + 5.00\hat{j}) \\ &= (-4.00t - 1.00)\hat{i},\end{aligned}$$

Because  $\vec{r}$  lacks any  $z$  component and because  $\vec{v}$  lacks any  $y$  or  $z$  component, the only nonzero term is

$$\vec{r} \times \vec{v} = -(-4.00t - 1.00)(5.00)\hat{k} = (20.0t + 5.00)\hat{k} \text{ m}^2/\text{s}.$$

$$\begin{aligned}\vec{\tau} &= \frac{d}{dt}(10.0t + 2.50)\hat{k} \text{ kg} \cdot \text{m}^2/\text{s} \\ &= 10.0\hat{k} \text{ kg} \cdot \text{m}^2/\text{s}^2 = 10.0\hat{k} \text{ N} \cdot \text{m}, \text{ (Answer)}\end{aligned}$$

## 11-7 Angular Momentum of a Rigid Body (1 of 6)

### Learning Objectives

- 11.22** For a system of particles, apply Newton's second law in angular form to relate the net torque acting on the system to the rate of the resulting change in the system's angular momentum.
- 11.23** Apply the relationship between the angular momentum of a rigid body rotating around a fixed axis and the body's rotational inertia and angular speed around that axis.
- 11.24** If two rigid bodies rotate about the same axis, calculate their total angular momentum.

## 11-7 Angular Momentum of a Rigid Body (2 of 6)

- We sum the angular momenta of the particles to find the angular momentum of a system of particles:

$$\vec{L} = \vec{\ell}_1 + \vec{\ell}_2 + \vec{\ell}_3 + \cdots + \vec{\ell}_n = \sum_{i=1}^n \vec{\ell}_i. \quad \text{Equation (11-26)}$$

- The rate of change of the net angular momentum is:

$$\frac{d\vec{L}}{dt} = \sum_{i=1}^n \vec{\tau}_{\text{net},i}. \quad \text{Equation (11-28)}$$

- In other words, the net torque is defined by this change:

$$\vec{\tau}_{\text{net}} = \frac{d\vec{L}}{dt} \quad (\text{system of particles}), \quad \text{Equation (11-29)}$$

Copyright ©2018 John Wiley &amp; Sons, Inc

43

43

## 11-7 Angular Momentum of a Rigid Body (3 of 6)

The net external torque  $\vec{\tau}_{\text{net}}$  acting on a system of particles is equal to the time rate of change of the system's total angular momentum  $\vec{L}$

Copyright ©2018 John Wiley &amp; Sons, Inc

44

44



## 11-7 Angular Momentum of a Rigid Body (4 of 6)

- Note that the torque and angular momentum must be measured relative to the same origin
- If the center of mass is accelerating, then that origin must be the center of mass
- We can find the angular momentum of a rigid body as

$$L_z = \sum_{i=1}^n \ell_{iz} = \sum_{i=1}^n \Delta m_i v_i r_{i\perp} \quad \text{Equation (11-30)}$$

$$= \sum_{i=1}^n \Delta m_i (\omega r_{i\perp}) r_{i\perp} = \omega \left( \sum_{i=1}^n \Delta m_i r_{i\perp}^2 \right)$$

- The sum is the rotational inertia  $I$  of the body



Copyright ©2018 John Wiley &amp; Sons, Inc

45

45

## 11-7 Angular Momentum of a Rigid Body (5 of 6)

- Therefore, this simplifies to:

$$L = I\omega \quad (\text{rigid body, fixed axis}). \quad \text{Equation (11-31)}$$

**Table 11-1** More Corresponding Variables and Relations for Translational and Rotational Motion<sup>a</sup>

Translational	Translational	Rotational	Rotational
Force	$\vec{F}$	Torque	$\vec{\tau} (= \vec{r} \times \vec{F})$
Linear momentum	$\vec{p}$	Angular momentum	$\vec{\ell} (= \vec{r} \times \vec{p})$
Linear momentum <sup>b</sup>	$\vec{p} (= \sum \vec{p}_i)$	Angular momentum <sup>b</sup>	$\vec{L} (= \sum \vec{\ell}_i)$
Linear momentum <sup>b</sup>	$\vec{p} (= M\vec{v}_{\text{com}})$	Angular momentum <sup>c</sup>	$L = I\omega$
Newton's second law <sup>b</sup>	$\vec{F}_{\text{net}} = \frac{d\vec{p}}{dt}$	Newton's second law <sup>b</sup>	$\vec{\tau}_{\text{net}} = \frac{d\vec{L}}{dt}$
Conservation law <sup>d</sup>	$\vec{p} = \text{a constant}$	Conservation law <sup>d</sup>	$\vec{L} = \text{a constant}$

Copyright ©2018 John Wiley &amp; Sons, Inc


46

46

## 11-7 Angular Momentum of a Rigid Body (6 of 6)

### Checkpoint 6

In the figure, a disk, a hoop, and a solid sphere are made to spin about fixed central axes (like a top) by means of strings wrapped around them, with the strings producing the same constant tangential force  $\vec{F}$  on all three objects. The three objects have the same mass and radius, and they are initially stationary. Rank the objects according to (a) their angular momentum about their central axes and (b) their angular speed, greatest first, when the strings have been pulled for a certain time  $t$ .



**Answer:**

- (a) All angular momenta will be the same, because the torque is the same in each case
- (b) sphere, disk, hoop

Copyright ©2018 John Wiley & Sons, Inc

47

47

## 11-8 Conservation of Angular Momentum (1 of 7)

### Learning Objectives

**11.25** When no external net torque acts on a system along a specified axis, apply the conservation of angular momentum to relate the initial angular momentum value along that axis to the value at a later instant.

Copyright ©2018 John Wiley & Sons, Inc

48

48



## 11-8 Conservation of Angular Momentum (2 of 7)

- Since we have a new version of Newton's second law, we also have a new conservation law:

$$\vec{L} = \text{a constant} \quad (\text{isolated system}). \quad \text{Equation (11-32)}$$

- The **law of conservation of angular momentum** states that, for an isolated system,  
(net initial angular momentum) = (net final angular momentum)

$$\vec{L}_i = \vec{L}_f \quad (\text{isolated system}). \quad \text{Equation (11-33)}$$

## 11-8 Conservation of Angular Momentum (3 of 7)

If the net external torque acting on a system is zero, the angular  $\vec{L}$  of the system remains constant, no matter what changes take place within the system.

- Since these are vector equations, they are equivalent to the three corresponding scalar equations
- This means we can separate axes and write:

If the component of the net external torque on a system along a certain axis is zero, then the component of the angular momentum of the system along that axis cannot change, no matter what changes take place within the system.


- If the distribution of mass changes with no external torque, we have:

$$I_i \omega_f = I_f \omega_f. \quad \text{Equation (11-34)}$$

## 11-8 Conservation of Angular Momentum (4 of 7)

### Example Angular momentum conservation

- An ice skater is spinning with both arms and a leg outstretched. She pulls her arms and leg inward and her spinning motion changes dramatically.

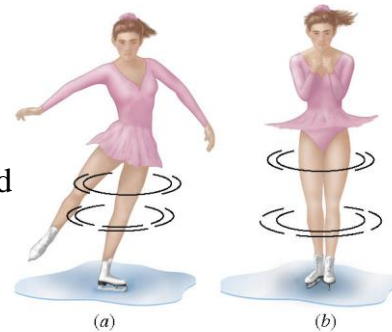

Copyright ©2018 John Wiley & Sons, Inc

51

51

## 11-8 Conservation of Angular Momentum (4 of 7)

### Example Angular momentum conservation

- A springboard diver: rotational speed is controlled by tucking her arms and legs in, which reduces rotational inertia and increases rotational speed

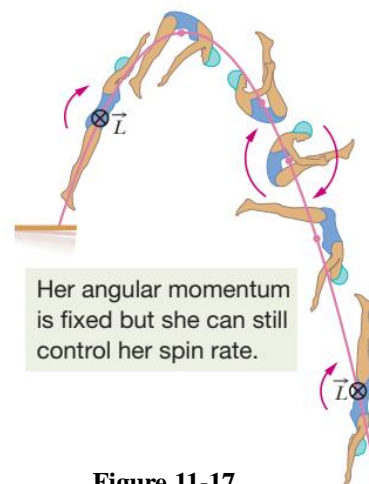


Figure 11-17

Copyright ©2018 John Wiley & Sons, Inc


52

52

## 11-8 Conservation of Angular Momentum (4 of 7)

### Example Angular momentum conservation

- A long jumper: the angular momentum caused by the torque during the initial jump can be transferred to the rotation of the arms, by wind milling them, keeping the jumper upright

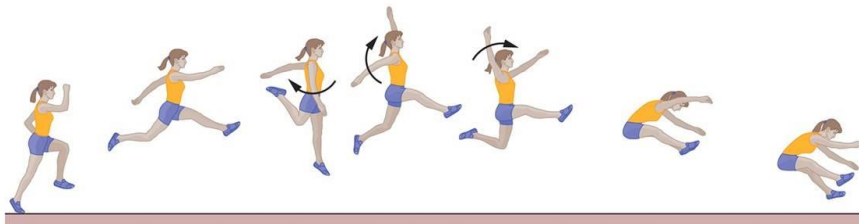

Copyright © 2014 John Wiley & Sons, Inc. All rights reserved.

**Figure 11-18**

Copyright ©2018 John Wiley & Sons, Inc

53

53

## 11-8 Conservation of Angular Momentum (5 of 7)

### Checkpoint 7

A rhinoceros beetle rides the rim of a small disk that rotates like a merry-go-round. If the beetle crawls toward the center of the disk, do the following (each relative to the central axis) increase, decrease, or remain the same for the beetle-disk system: (a) rotational inertia, (b) angular momentum, and (c) angular speed?

#### Answer:

- (a) decreases
- (b) remains the same
- (c) increases

Copyright ©2018 John Wiley & Sons, Inc


54

54

## 11-8 Conservation of Angular Momentum (6 of 7)

### Example : A Satellite in an Elliptical Orbit

An artificial satellite is placed in an elliptical orbit about the earth. Its point of closest approach is  $8.37 \times 10^6$  m from the center of the earth, and its point of greatest distance is  $25.1 \times 10^6$  m from the center of the earth.

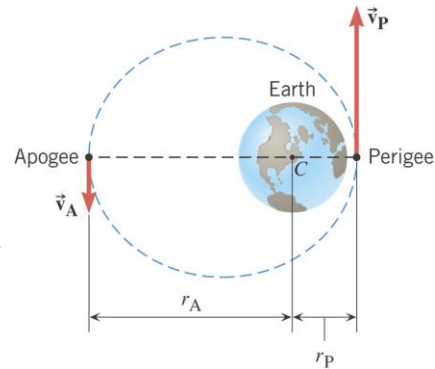

The speed of the satellite at the perigee is 8450 m/s. Find the speed at the apogee.

Copyright ©2018 John Wiley & Sons, Inc

55

55

## 11-8 Conservation of Angular Momentum (7 of 7)

### Example : A Satellite in an Elliptical Orbit

Angular Momentum is conserved

$$I_A \omega_A = I_P \omega_P$$

where,


$$I = Mr^2 \quad \text{and} \quad \omega = \frac{v}{r}$$

Thus,

$$mr_A^2 \frac{v_A}{r_A} = mr_P^2 \frac{v_P}{r_P}$$

yielding,

$$v_A = \frac{r_P v_P}{r_A} = \frac{(8.37 \times 10^6 \text{ m})(8450 \text{ m/s})}{25.1 \times 10^6 \text{ m}} = 2820 \text{ m/s}$$

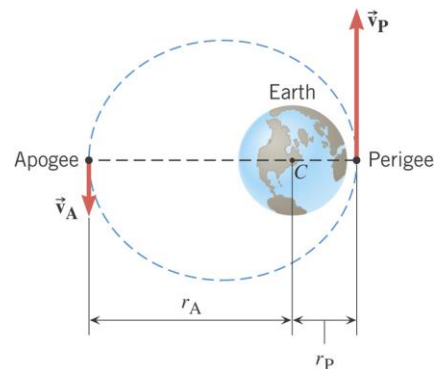

Copyright ©2018 John Wiley & Sons, Inc

56

56

## 11-9 Precession of a Gyroscope (1 of 7)

### Learning Objectives


- 11.26** Identify that the gravitational force acting on a spinning gyroscope causes the spin angular momentum vector (and thus the gyroscope) to rotate about the vertical axis in a motion called precession.
- 11.27** Calculate the precession rate of a gyroscope.
- 11.28** Identify that a gyroscope's precession rate is independent of the gyroscope's mass.

Copyright ©2018 John Wiley & Sons, Inc

57

57

## 11-9 Precession of a Gyroscope (2 of 7)

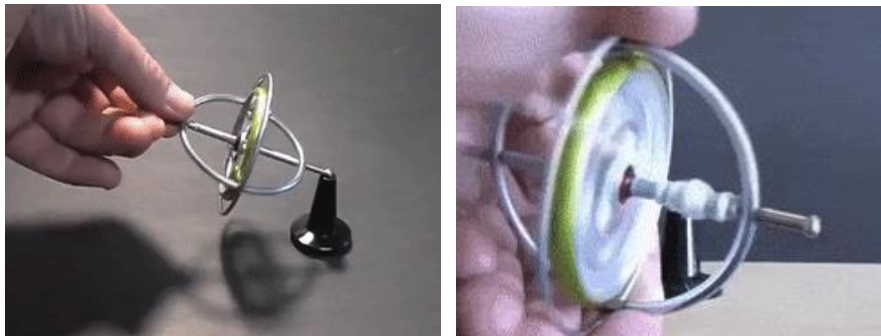

gfycat.com

Copyright ©2018 John Wiley & Sons, Inc

58

58

## 11-9 Precession of a Gyroscope (3 of 7)

- A nonspinning gyroscope, as attached in 11-22 (a), falls
- A spinning gyroscope (b) instead rotates around a vertical axis
- This rotation is called **precession**






Figure 11-22

Copyright ©2018 John Wiley & Sons, Inc

Copyright © 2014 John Wiley & Sons, Inc. All rights reserved.

59

## 11-9 Precession of a Gyroscope (4 of 7)



- The angular momentum of a (rapidly spinning) gyroscope is:

$$L = I\omega, \quad \text{Equation (11-43)}$$

- The torque can only change the direction of  $L$ , not its magnitude, because of (11-43)

$$d\vec{L} = \vec{\tau} dt. \quad \text{Equation (11-44)}$$

- The only way its direction can change along the direction of the torque without its magnitude changing is if it rotates around the central axis.



Copyright ©2018 John Wiley & Sons,

60

## 11-9 Precession of a Gyroscope (5 of 7)



- The torque is given by the weight, thus,

$$dL = \tau dt = Mgr dt$$

- As  $\vec{L}$  changes by an incremental amount in an incremental time interval  $dt$ , the shaft and  $\vec{L}$  precess around the  $z$  axis through incremental angle  $d\phi$ .

- Hence,

$$d\phi = \frac{dL}{L} = \frac{Mgr dt}{I\omega}$$



Copyright ©2018 John Wiley & Sons,

61

## 11-9 Precession of a Gyroscope (6 of 7)

- This is called **precession rate**, is given by:

$$\Omega = \frac{Mgr}{I\omega}$$

Equation (11-46)

- True for a sufficiently rapid spin rate
- Independent of mass, ( $I$  is proportional to  $M$ ) but does depend on  $g$
- Valid for a gyroscope at an angle to the horizontal as well (a top for instance)


Copyright ©2018 John Wiley & Sons, Inc

62

62

## 11-9 Precession of a Gyroscope (7 of 7)

### Gyro Compass

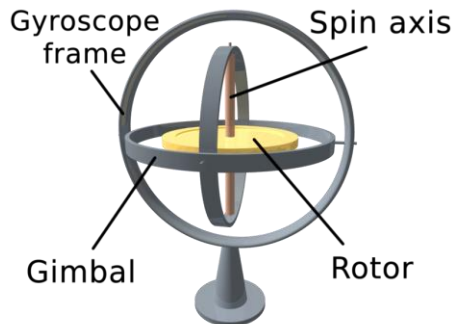

gfycat.com

Copyright ©2018 John Wiley



63

## 11 Summary (1 of 3)

### Rolling Bodies

$$v_{\text{com}} = \omega R \quad \text{Equation (11-2)}$$

$$K = \frac{1}{2} I_{\text{com}} \omega^2 + \frac{1}{2} M v_{\text{com}}^2 \quad \text{Equation (11-5)}$$

$$a_{\text{com}} = \alpha R \quad \text{Equation (11-6)}$$

### Torque as a Vector

- Direction given by the right-hand rule

$$\vec{\tau} = \vec{r} \times \vec{F} \quad \text{Equation (11-14)}$$

Copyright ©2018 John Wiley & Sons, Inc

64

64



## 11 Summary (2 of 3)

### Angular Momentum of a Particle

$$\vec{\ell} = \vec{r} \times \vec{p} = m(\vec{r} \times \vec{v}) \quad \text{Equation (11-18)}$$

### Newton's Second Law in Angular Form

$$\vec{\tau}_{\text{net}} = \frac{d\vec{\ell}}{dt} \quad \text{Equation (11-23)}$$

### Angular Momentum of a System of Particles

$$\vec{L} = \vec{\ell}_1 + \vec{\ell}_2 + \vec{\ell}_3 + \cdots + \vec{\ell}_n = \sum_{i=1}^n \vec{\ell}_i \quad \text{Equation (11-26)}$$

$$\vec{\tau}_{\text{net}} = \frac{d\vec{L}}{dt} \quad \text{Equation (11-29)}$$

Copyright ©2018 John Wiley &amp; Sons, Inc

65

65

## 11 Summary (3 of 3)

### Angular Momentum of a Rigid Body

$$L = I\omega \quad \text{Equation (11-31)}$$

### Conservation of Angular Momentum

$$\vec{L} = \text{a constant} \quad \text{Equation (11-32)}$$

$$\vec{L}_i = \vec{L}_f \quad \text{Equation (11-33)}$$

### Precession of a Gyroscope

$$\Omega = \frac{Mgr}{I\omega} \quad \text{Equation (11-46)}$$

Copyright ©2018 John Wiley &amp; Sons, Inc

66

66

# Copyright

## **Copyright © 2018 John Wiley & Sons, Inc.**

All rights reserved. Reproduction or translation of this work beyond that permitted in Section 117 of the 1976 United States Act without the express written permission of the copyright owner is unlawful. Request for further information should be addressed to the Permissions Department, John Wiley & Sons, Inc. The purchaser may make back-up copies for his/her own use only and not for distribution or resale. The Publisher assumes no responsibility for errors, omissions, or damages, caused by the use of these programs or from the use of the information contained herein.